
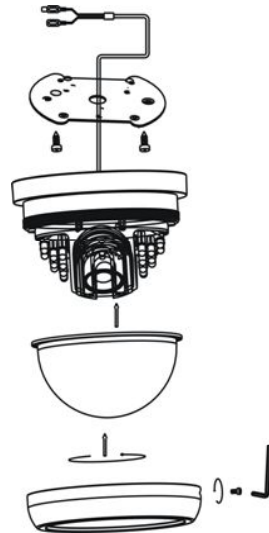


6) TECHNICAL SPECIFICATIONS

	IRC35134	IRC35137	IRC35139
Image Sensor	1/4" Sony CCD	Sharp 1/3" CCD	Sony 1/3" CCD
Resolution	420 Lines	520 Lines	520 Lines
Lens	4.0 - 9.0 mm @ F1.6		
Effective Pixels	510(H) x 492(V)	768(H) x 494(V)	768(H) x 494(V)
Min. Illumination	0 LUX (LED on) / 1.0 LUX (LED off)		
Field of View	54° - 23°		
Electric Shutter	1/60s - 1/10,000s		
S/N Ratio	>48dB		
Operating Temperature	-10°C ~ 45°C (14°F ~ 113°F)		
Operating Humidity	50%-80%		
LED Quantity	19 pcs (@ 5mm)		
IR Range	50 ft / 15 m (under optimal conditions)		
IP Rating	IP67		
Power Requirement	12V dc / 24 V ac		
Current Consumption	280 mA	250 mA	280 mA

7) DIMENSIONS & SETUP

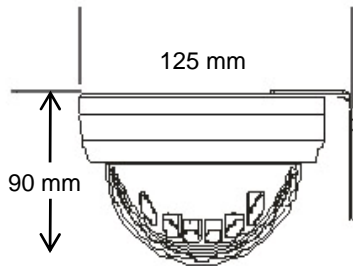

8) WARRANTY

IRES Technology warrants all of its products for one year, starting from the date of purchase. Please refer to the included Warranty card or go to www.IREStechology.com for more details. In no event shall IRES be liable for incidental, accidental or consequential damages arising from the use or inability to use its products.

SETUP INSTRUCTIONS



IRC35130 Series

**Hi-Res Indoor/Outdoor Varifocal
Vandal Resistant Color Dome
Camera with 19 LEDs**



For more information visit:

www.IREStechology.com

Thank you for purchasing the IRC35130 Series camera from IRES Technology. Please review the following instructions thoroughly before installing and connecting the camera.

1) CAMERA MODEL

Depending on the camera purchased, you received one of the following models:

- IRC35134 – 1/4" Sony CCD, 420 TV Lines
- IRC35137 – 1/3" Sharp CCD, 520 TV Lines
- IRC35139 – 1/3" Sony CCD, 520 TV Lines

2) FEATURES

- Hi-res image sensor provides outstanding picture quality
- 4-9 mm Varifocal Lens with Zoom and Focus Adjustment
- Heavy-duty Vandal Resistant construction
- 19 high intensity LED's provide Night Vision of up to 50 ft
- Rugged IP67 protection against rain, dust and moisture
- Picture automatically turns to B/W in low light conditions
- Rotate 360° and/or Tilt 90° for optimal viewing angle selection

3) CONTENTS

Please ensure that your package includes the following:

- IRC35130 Series Camera
- Mounting Bracket x 2 (Ceiling and Wall)
- Mounting Screws
- Hex Wrench Tool
- Owner's Manual




Note: Power Adapter and Video/Power Cable are not supplied but can be purchased separately at www.IREStechology.com

4) CAMERA INSTALLATION

i Before permanently mounting the camera, it is recommended that you first confirm its performance by connecting it to your DVR / Monitor, powering the unit and viewing the picture.

a) Loosen the locking screw with the supplied Hex wrench and remove the mounting base.





b) Mount the base to a ceiling or wall using the supplied screws and the appropriate ceiling / wall mounting bracket.

c) Rotate and Tilt the camera to the desired viewing angle.


d) Reattach the dome cover by tightening the swivel and securing it using the Hex wrench.

e) Connect the camera to a Video/Power extension cable [Male BNC / Male DC]. Cable is not included as standard but can be purchased through www.IREStechology.com

f) Run the cable to a DVR or Monitor input and connect the BNC Video. Also connect a 12V DC Power Adapter - available online at www.IREStechology.com

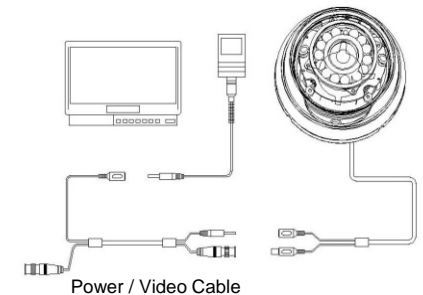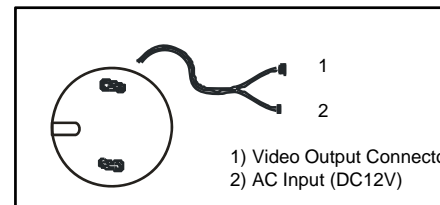

5) VARIFOCAL ADJUSTMENT



Use the levers on the lens to adjust the Focus and Zoom controls.